Gate Control

BY TELL

GSM status Indicator LED

FIRMWARE UPDATE button

STATUS operation indicator LED

POWER SUPPLY
12-30V DC
or
12-24V AC

2 FULL-FEATURED RELAY OUTPUTS with NO/NC and COM connections

GSM ANTENNA SMA antenna connector

4 CONTACT-CONTROLLED inputs

USB-C

Nano SIM (4FF)

OUT1 OUT2
NC NO COM NC NO COM GND IN1 IN2 IN3 IN4 GND GND GND
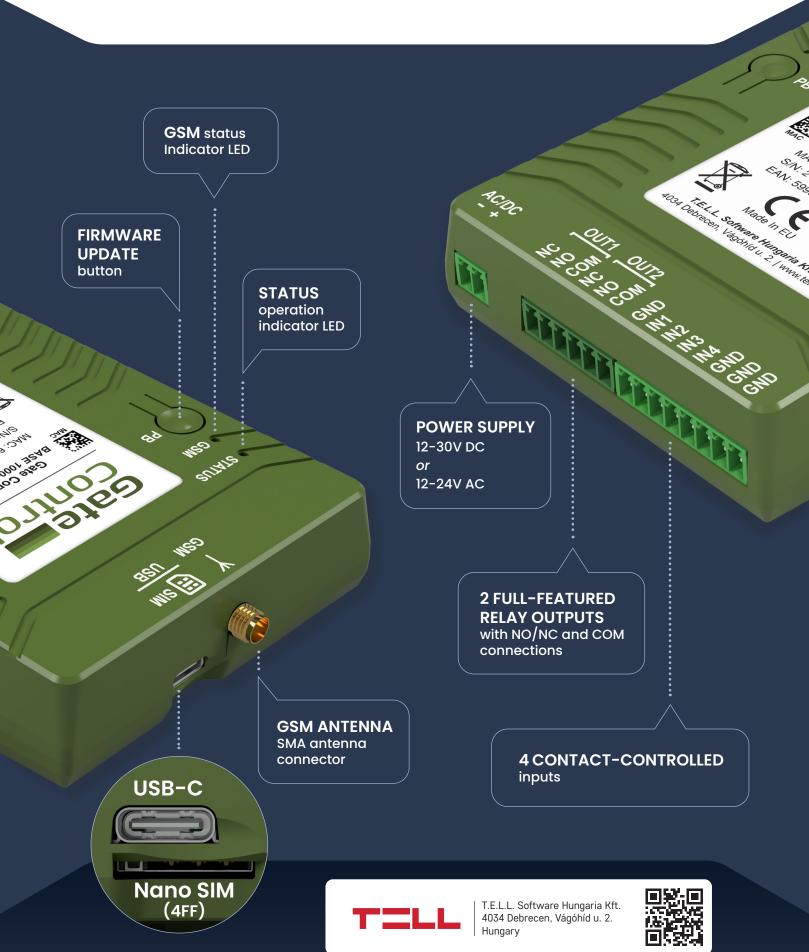
AC/DC - +

T.E.L.L. Software Hungaria Kft.
4034 Debrecen, Vágóhíd u. 2.
Hungary

Gate Control Base

Gate Control Base Din rail

Discover the new-generation gate controller, the **Gate Control Base DIN rail!**

It features unchanged software and firmware functionalities, automatic APN configuration, an improved exterior design, and faster, more straightforward installation options, starting from 2025.

Why choose the Gate Control Base DIN rail?

DIN rail compatibility: Simplifies and accelerates installation.

Practical front panel: The label with manufacturing information is placed on the front, ensuring it is always accessible.

Convenient Nano SIM usage: The SIM card can be easily inserted at the top of the device.

Wider power supply range: Supports 12–30 V DC and 12–24 V AC.

USB-C connector: Modern and fast connectivity option.

The **Gate Control PRO 1000 DIN rail** is the perfect combination of cutting-edge technology and user-friendly design!

Gate Control BASE	Product types	Gate Control Base Din rail
Gate Control BASE 1000-4G.IN4.R2	Product types	Gate Control BASE 1000 DIN rail 4G.IN4.R2
90 x 72 x 32 mm	Dimensions	88,4 x 119 x 23,1 mm
Not available	24 V AC power supply	Available
Not available	DIN rail mount	Available
Mini SIM (2FF)	SIM card type	Nano SIM (4FF)
USB A-B	Connector type	USB-C
4 inputs and 2 outputs	Number of inputs and outputs	4 inputs and 2 outputs
Previously on the back of the device	Placement of manufacturing information label	Now placed on the front panel for better accessibility
No changes	Software and firmware	No changes